


DMC-012-016



Module 12 circuits 16A unipolares

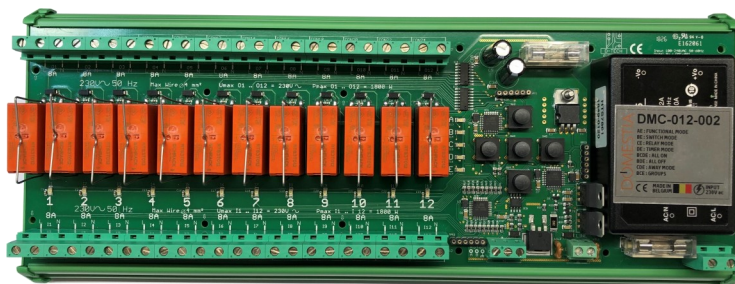

Maximum current 16A per output (replaceable relay / relay 8A bipolar optional)

Power supply (tension) 230~ +/-10%, frequency 50Hz

Installation Rail DIN (larger 18 modules)

Command system bus Domestia

Power consumption Maximum 10W

Connecting terminals for the power

and output 2 x 2.5 mm² or 1 x 4 mm²

Connecting terminals for RS485 and 1 x 1.5 mm²

Programming 5 touch controls

Bus bus 10VDC on 2 wires non-polarized (section min. 0.5mm²)

Temperature extremes -10°C to +45°C

Maximum distance to the farthest PB 300m with the bus Domestia

Weight 965gr.

All functions Following functions :

Switch

Relay

Timer (program from 30 seconds to 127 minutes)

All-on selective

All-off selective (with or without a 30 second delay)

Simulation of presence

Groups (4)

Norms See page 2

Packaging 1Unit

