


DML-004-002



Extention module 4 dimmable circuits LED (4x250W)

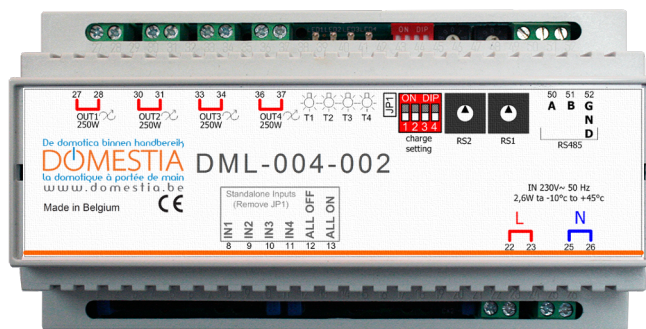

- | | |
|---|---|
| Charges | . Light dimmable in leading edge
. Light dimmable in trailing edge
. LED or halogen light with a transformer electromagnetic
. LED or halogen light with a transformer electronic
. Halogen light 100-240VAC
. Incandescent light 100-240VAC |
| Power supply(tension) | 100-240VAC, frequency 50-60Hz |
| Installation | Rail DIN (larger 9 modules) |
| Command system | 100-240VAC or <i>bus</i> Domestia |
| Power consumption | Maximum 3W |
| Temperature max. enclosure (°c) | 90°c |
| Connecting terminals for power supply and outputs | 2 x 1.5mm ² or 1 x 2.5mm ² |
| Connecting terminals for RS485 input | 2 x 1.5mm ² or 1 x 2.5mm ² |
| Power range | 3W - 250W per output |
| Protection | Protection in case of over heating and short-circuit |
| Pushbutton switch (mode stand alone) | NO 100-240VAC; 5mA (without galvanic insulation) |
| Pushbutton switch (mode <i>bus</i> Domestia) | NO |
| Temperature extremes | -10°c to +45°c |
| Maximum distance to the farthest pushbutton switch | 50m in mode stand alone / 300m with the <i>bus</i> Domestia |
| Weight | 357gr. |
| Dimming curb per individual light | Adjustable for each output (dip-switch) - leading or trailing edge |
| Minimum dimming level | Individually adjustable per output |
| Norms | See page 2 |
| Packaging | 1Unit |



DOMESTIA