


DMCV-006-002



Module for 6 shutters or blinds

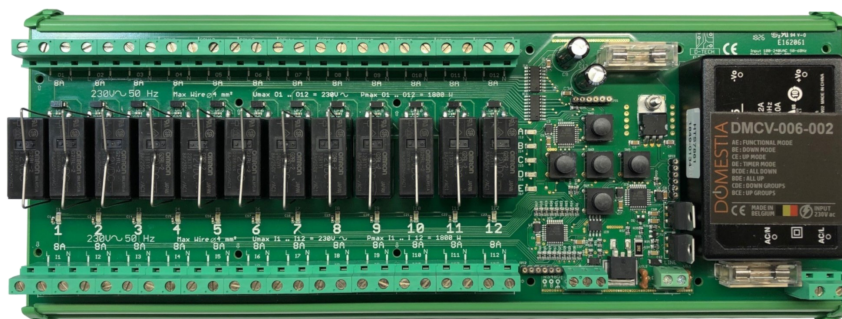

Power supply (tension) 100-240VAC, frequency 50-60Hz

Installation Rail DIN (larger 18 modules)

Command system Bus Domestia

Power consumption Maximum 10W

Connecting terminals for the power and

Output 2 x 2.5 mm² or 1 x 4mm²

Connecting terminals for RS485 and bus 1 x 1.5mm²

Maximum current 8A per output (relay replaceable/relay 16A unipolar optional)

Programming 5 touch controls

Bus 10VDC on 2 wires non-polarized (section min 0.5mm)

Temperature extremes -10°C to +45°C

Maximum distance to the farthest PB

Switch 300 m with the bus Domestia

Weight 965 gr

All functions Following functions:

Up

Down

Timer (set the parameters for the upward-downward coarse)

All-up selective

All-down selective

2 groups upward

2 groups downward

Norms See page 2

Packaging 1 unit

